

# Instruction for Vector Optics Tactical Bipod Mounts

**ATTENTION: Make sure firearm is unloaded**

## Universal Picatinny Style




- Fit 21mm weaver and picatinny rail
- Press down the lockable button to open or folder the bipod
- Turn and release the leg sleeve, the spring loaded leg will be extended, then fasten the leg sleeve again
- To retract the leg, loosen the leg sleeve, push back the leg to the end, retighten the leg sleeve again
- Solid rubber feet avoid slipping
- With barrel mount adapter

## Stud Connection Style



- Stud connection mount for sling attachment
- Press the button to release the spring loaded leg
- If need to retract the extendable leg, just press the button again and push the leg back
- Solid rubber feet avoid slipping
- With weaver picatinny mount adapter. To use the adapter, remove the bipod tiny rubber sleeve, clamp into the adapter stud hole. Fasten the bottom nut.

## Swivel Stud Connection Style

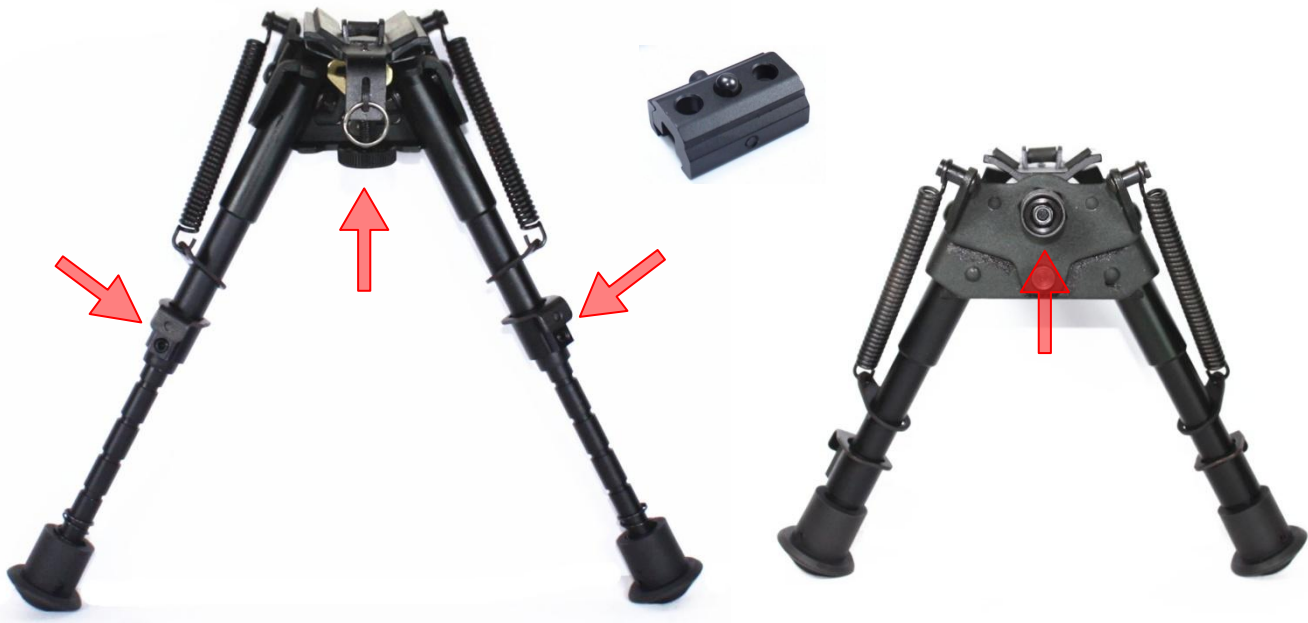

- Swivel stud connection mount for sling swivel attachment
- Press the button to release the spring loaded leg
- 15 inch bipod, press first button and pull the extendable legs, press last button to release the spring loaded leg
- If need to retract the extendable leg, just press the button again and push the leg back
- Solid rubber feet avoid slipping
- Weaver picatinny mount adapter. To use the adapter, remove the bipod tiny rubber sleeve, clamp into the adapter stud hole. Fasten the bottom nut.
- Swing-able design for leveling on uneven ground. Select proper angle and fasten thumb nut to lock the position

TAC Vector Optics

[www.scvector.biz](http://www.scvector.biz) [www.scvector.com](http://www.scvector.com)

